


RAINGUNS R3S / R6S

mm	BAR	M	M ³ /h	LT/SEC
4	1,5	11,5	0,70	0,19
	2	12,0	0,83	0,23
	2,5	12,6	0,92	0,25
	3	13,2	1,00	0,28
	3,5	13,8	1,08	0,30
	4	14,2	1,25	0,34
4.5	1,5	12,0	0,90	0,25
	2	12,5	1,08	0,30
	2,5	13,0	1,18	0,33
	3	13,6	1,29	0,36
	3,5	14,2	1,40	0,39
	4	14,7	1,60	0,44
5	2	12,5	1,11	0,31
	2	13,0	1,32	0,36
	2,5	13,7	1,47	0,41
	3	14,3	1,60	0,44
	3,5	14,8	1,75	0,48
	4	15,3	1,90	0,52
5.5	1,5	13,0	1,40	0,38
	2	13,5	1,65	0,45
	2,5	14,2	1,80	0,50
	3	14,6	1,98	0,55
	3,5	15,3	2,12	0,59
	4	16,0	2,30	0,63
6	1,5	13,5	1,70	0,47
	2	14,2	1,97	0,54
	2,5	14,8	2,16	0,60
	3	15,4	2,34	0,65
	3,5	16,0	2,52	0,70
	4	16,4	2,70	0,75

MODEL R3S

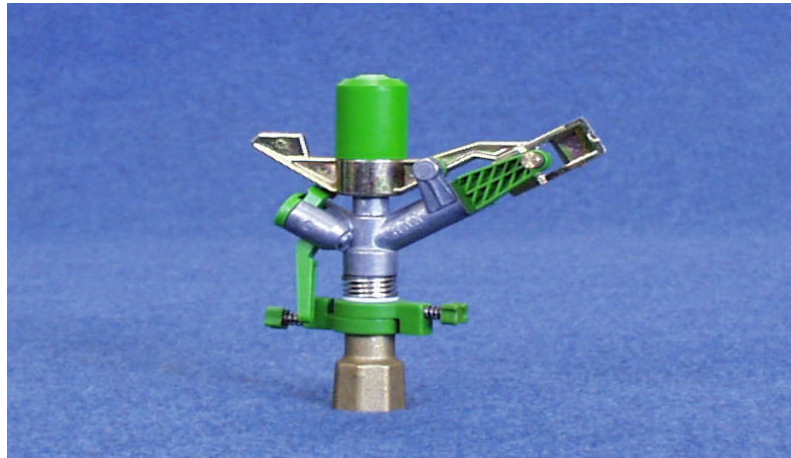

Sprinkler with variable sectorial and circular operation for small and medium flow rates. Suitable for multi-purpose irrigation and antifrost protection.

mm	BAR	M	M ³ /h	LT/SEC
5	1,5	13,5	1,10	0,30
	2	14,0	1,30	0,36
	3	15,0	1,59	0,44
	4	16,0	1,83	0,50
	5	17,0	2,05	0,56
6	1,5	14,0	1,65	0,45
	2	14,5	1,87	0,51
	3	15,5	2,29	0,63
	4	17,0	2,64	0,73
	5	18,0	2,96	0,82
7	1,5	14,5	2,24	0,62
	2	15,0	2,55	0,70
	3	16,0	3,12	0,86
	4	17,5	3,60	1,00
	5	18,5	4,03	1,11
8	1,5	15,0	2,92	0,81
	2	15,5	3,33	0,92
	3	17,0	4,08	1,13
	4	18,5	4,71	1,30
	5	19,0	5,27	1,46

MODEL R6S




Sprinkler with variable sectors and complete turn operation for small and medium flow rates. The sector can be easily adjusted enabling the sprinkler to complete permanent systems for garden irrigation.

R3S & R6S Cobra Stands

RAINGUNS R15S / R25S

mm	BAR	M	M ³ /h	LT/SEC
8	1,5	15,0	2,94	0,816
	2	16,5	3,34	0,927
	3	19,0	4,09	1,136
	4	21,5	4,70	1,305
9	1,5	15,5	3,68	1,022
	2	17,0	4,25	1,180
	3	20,0	5,22	1450.00
	4	22,0	6,06	1,683
10	1,5	16,0	4,35	1,208
	2	18,0	5,20	1,444
	3	20,5	6,37	1,769
	4	22,5	7,38	2,050
11	2	18,5	6,39	1,775
	3	21,0	7,82	2,172
	4	23,0	9,05	2,513
12	2	19,0	7,60	2,111
	3	21,5	9,04	2,511
	4	24,0	10,76	2,980
13	2	19,5	8,95	2,486
	3	22,0	10,70	2,972
	4	24,5	12,50	3,472

MODEL R15S

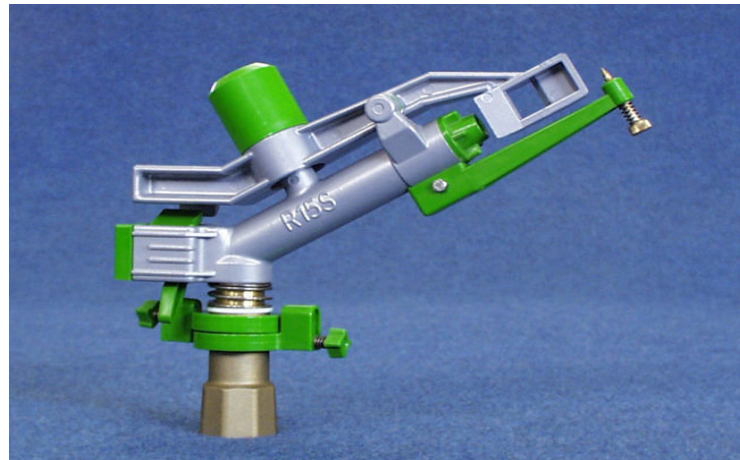

Single jet medium capacity sprinkler with complete turn or variable sectorial operation. It is equipped with adjustable jet divider and requires no lubrication.

mm	BAR	M	M ³ /h	LT/SEC
8	2	18,0	5,30	1,47
	3	20,5	6,41	1,78
	4	23,0	7,63	2,11
	5	24,5	8,75	2,43
10	2	19,5	7,20	2,00
	3	22,0	8,89	2,49
	4	24,5	10,12	2,81
	5	27,5	11,60	3,22
12	2	21,5	9,55	2,65
	3	24,0	11,73	3,25
	4	26,5	13,40	3,72
	5	29,0	14,90	4,13
	6	31,0	16,45	4,56
14	2	23,0	12,30	3,41
	3	26,0	15,08	4,18
	4	28,5	17,32	4,81
	5	30,5	19,41	5,39
	6	32,5	21,25	5,90
16	2	25,0	15,70	4,36
	3	28,0	18,95	5,26
	4	30,0	21,85	6,06
	5	32,0	24,35	6,76
	6	34,0	27,20	7,55
18	3	29,5	24,40	6,77
	4	32,0	27,00	7,50
	5	34,5	30,20	8,38
	6	37,0	32,80	9,11
20	3	32,0	30,00	8,33
	4	35,0	33,00	9,16
	5	37,5	36,00	10,0
	6	39,5	38,90	10,8

MODEL R25S



Medium capacity sprinkler with sectorial and circular operation. It is equipped with two adjustable jet dividers ensuring uniform distribution while the secondary nozzle maintains constant feed at the various pressures.

R15S & R25S Base Stands

R15S & R25S Tripods