


RAINGUNS R3S / R6S

MODEL R3S – 0.75” FBSP @ £35.00



Sprinkler with variable sectorial and circular operation for small and medium flow rates. Suitable for multi-purpose irrigation and antifrost protection.

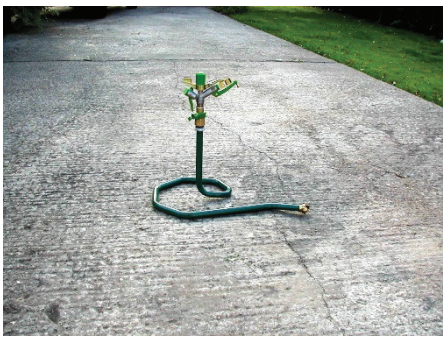

COBRA STAND £18.00



FIXED TRIPOD £23.50

MODEL R6S – 1” FBSP @ £44.50



Sprinkler with variable sectors and complete turn operation for small and medium flow rates. The sector can be easily adjusted enabling the sprinkler to complete permanent systems for garden irrigation.



SLED BASE £35.00




**ADJUSTABLE TRIPOD
£30.00**

mm	BAR	M	M ³ /h	LT/SEC
4	1,5	11,5	0,70	0,19
	2	12,0	0,83	0,23
	2,5	12,6	0,92	0,25
	3	13,2	1,00	0,28
	3,5	13,8	1,08	0,30
4.5	4	14,2	1,25	0,34
	1,5	12,0	0,90	0,25
	2	12,5	1,08	0,30
	2,5	13,0	1,18	0,33
	3	13,6	1,29	0,36
5	3,5	14,2	1,40	0,39
	4	14,7	1,60	0,44
	2	12,5	1,11	0,31
	2	13,0	1,32	0,36
	2,5	13,7	1,47	0,41
5.5	3	14,3	1,60	0,44
	3,5	14,8	1,75	0,48
	4	15,3	1,90	0,52
	1,5	13,0	1,40	0,38
	2	13,5	1,65	0,45
6	2,5	14,2	1,80	0,50
	3	14,6	1,98	0,55
	3,5	15,3	2,12	0,59
	4	16,0	2,30	0,63
	1,5	13,5	1,70	0,47
6	2	14,2	1,97	0,54
	2,5	14,8	2,16	0,60
	3	15,4	2,34	0,65
	3,5	16,0	2,52	0,70
	4	16,4	2,70	0,75

5	1,5	13,5	1,10	0,30
	2	14,0	1,30	0,36
	3	15,0	1,59	0,44
	4	16,0	1,83	0,50
	5	17,0	2,05	0,56
6	1,5	14,0	1,65	0,45
	2	14,5	1,87	0,51
	3	15,5	2,29	0,63
	4	17,0	2,64	0,73
	5	18,0	2,96	0,82
7	1,5	14,5	2,24	0,62
	2	15,0	2,55	0,70
	3	16,0	3,12	0,86
	4	17,5	3,60	1,00
	5	18,5	4,03	1,11
8	1,5	15,0	2,92	0,81
	2	15,5	3,33	0,92
	3	17,0	4,08	1,13
	4	18,5	4,71	1,30
	5	19,0	5,27	1,46

RAINGUNS R15S / R25S

MODEL R15S – 1.25” @ £72.00

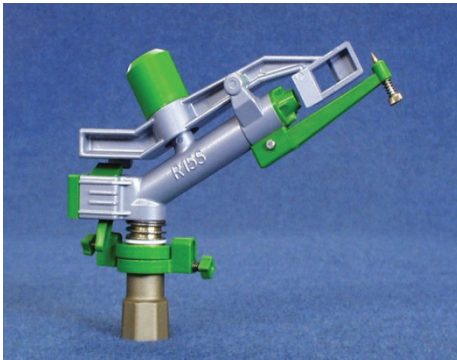

Single jet medium capacity sprinkler with complete turn or variable sectorial operation. It is equipped with adjustable jet divider and requires no lubrication.



SLED BASE ONLY £65.00

ADJUSTABLE TRIPOD £102.00

Connections Bauer Female £14.00

Instantaneous Male £46.00

MODEL R25S – 1.5” @ £99.50



Medium capacity sprinkler with sectorial and circular operation. It is equipped with two adjustable jet dividers ensuring uniform distribution while the secondary nozzle maintains constant feed at the various pressures.



SLED BASE only £65.00

ADJUSTABLE TRIPOD £114.00

Connections Bauer Female £14.00

Instantaneous Male £46.00

mm	BAR	M	M ³ /h	LT/SEC
8	1,5	15,0	2,94	0,816
	2	16,5	3,34	0,927
	3	19,0	4,09	1,136
	4	21,5	4,70	1,305
9	1,5	15,5	3,68	1,022
	2	17,0	4,25	1,180
	3	20,0	5,22	1450.00
	4	22,0	6,06	1,683
10	1,5	16,0	4,35	1,208
	2	18,0	5,20	1,444
	3	20,5	6,37	1,769
	4	22,5	7,38	2,050
11	2	18,5	6,39	1,775
	3	21,0	7,82	2,172
	4	23,0	9,05	2,513
12	2	19,0	7,60	2,111
	3	21,5	9,04	2,511
	4	24,0	10,76	2,980
13	2	19,5	8,95	2,486
	3	22,0	10,70	2,972
	4	24,5	12,50	3,472

mm	BAR	M	M ³ /h	LT/SEC
8	2	18,0	5,30	1,47
	3	20,5	6,41	1,78
	4	23,0	7,63	2,11
	5	24,5	8,75	2,43
10	2	19,5	7,20	2,00
	3	22,0	8,89	2,49
	4	24,5	10,12	2,81
	5	27,5	11,60	3,22
12	2	21,5	9,55	2,65
	3	24,0	11,73	3,25
	4	26,5	13,40	3,72
	5	29,0	14,90	4,13
	6	31,0	16,45	4,56
14	2	23,0	12,30	3,41
	3	26,0	15,08	4,18
	4	28,5	17,32	4,81
	5	30,5	19,41	5,39
	6	32,5	21,25	5,90
16	2	25,0	15,70	4,36
	3	28,0	18,95	5,26
	4	30,0	21,85	6,06
	5	32,0	24,35	6,76
	6	34,0	27,20	7,55
18	3	29,5	24,40	6,77
	4	32,0	27,00	7,50
	5	34,5	30,20	8,38
	6	37,0	32,80	9,11
20	3	32,0	30,00	8,33
	4	35,0	33,00	9,16
	5	37,5	36,00	10,0
	6	39,5	38,90	10,8

DUST SUPPRESSION RAINGUNS



**MODEL :S60 -
25°
FLANGE/
THREADED
2" BSPT
CONNECTION
£575.00**

Nozzle mm	Pressure atm	Discharge l/min	Length of Jet m
20	4,0 – 4,5 – 5,0	506 – 537 – 566	41 – 43 - 45
22	4,0 – 4,5 – 5,0	612 – 649 – 684	43 – 45 - 47
24	4,0 – 4,5 – 5,0	729 – 774 – 816	45 – 47 - 49
26	4,5 – 5,0 – 5,5	908 – 957 – 1004	47 – 49 - 51
28	4,5 – 5,0 – 5,5	1053 – 1110 – 1164	50 – 52 - 54
30	5,0 – 5,5 – 6,0	1273 – 1335 – 1394	53 - 55 - 57

**MODEL :S80 -
27°
FLANGE
CONNECTION
£730.00**

Nozzle mm	Pressure atm	Discharge l/min	Length of Jet m
26	4,5 – 5,0 – 5,5	908 – 957 – 1004	49 – 52 - 53
28	4,5 – 5,0 – 5,5	1053 – 1110 – 1164	51 – 54 - 56
30	5,0 – 5,5 – 6,0	1273 – 1335 – 1394	55 – 57 - 60
32	5,5 – 6,0 – 6,5	1520 – 1587 – 1652	58 – 62 - 65
34	6,0 – 6,5 – 7,0	1792 – 1865 – 1935	63 – 66 - 68
36	6,0 – 7,0 – 8,0	2008 – 2169 – 2319	65 – 70 - 75


**MODEL :S80 –
SUPER 27°
FLANGE
CONNECTION
£798.00**

Nozzle mm	Pressure atm	Discharge l/min	Length of Jet m
30	5,0 – 5,5 – 6,0	1273 – 1335 – 1394	56 – 60 - 62
32	6,0 – 6,5 – 7,0	1587 – 1652 – 1714	61 – 65 - 68
34	6,0 – 6,5 – 7,0	1729 – 1865 – 1935	63 – 66 - 70
36	7,0 – 8,0 – 9,0	2169 – 2319 – 2460	71 – 74 - 80
38	7,0 – 8,0 – 9,0	2418 – 2585 – 2742	73 – 78 - 83
40	8,0 – 9,0 – 10,0	2864 – 3038 – 3203	79 – 84 - 88

DUST SUPPRESSION RAINGUNS



MODEL : S60 - 43° FLANGE / 2" BSPT CONNECTION £640.00

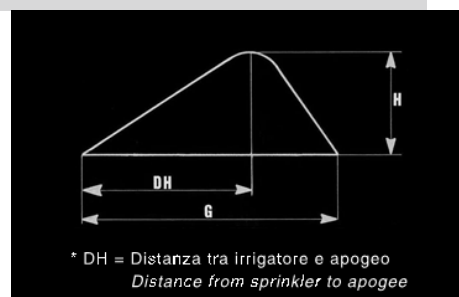

Nozzle mm	Pressure atm	Discharge l/min	Length of Jet G m	Apogee H m	Distance dh m
20	3,0-4,0-5,0	440-506-566	37-41-44	11-14-17	22-26-29
22	3,0-4,0-5,0	530-612-684	38-42-45	12-15-18	23-27-30
24	4,0-5,0-6,0	729-816-895	44-48-51	16,5-18-20	28-32-36
26	4,0-5,0-6,0	857-957-1050	46-50-52	16,5-18,5-20,5	30-33-36
28	4,0-5,0-6,0	994-1110-1220	48-51-54	17-19-21,5	31-34-37
30	5,0-6,0-7,0	1273-1394-1513	55-62-64	21-23-25	39-43-45

MODEL : S70 - 43° FLANGE CONNECTION £766.00

Nozzle mm	Pressure atm	Discharge l/min	Length of Jet G m	Apogee H m	Distance dh m
26	4,0-5,0-6,0	860-957-1060	47-51-53	17-19-21	31-35-37
28	4,0-5,0-6,0	997-1110-1225	49-54-57	18-22-25	32-38-40
30	5,0-6,0-7,0	1273-1394-1520	56-57-58	21-24-26	39-40-41
32	5,0-6,0-7,0	1475-1587-1735	61-63-66	22-25-27	40-42-43
34	5,0-6,0-7,0	1645-1792-1935	62-64-67	23-25,5-27,5	41-43-44
36	6,0-7,0-8,0	2008-2169-2316	68-71-73	25-29,5-34	48-50-53

MODEL : S80 - SUPER - 43° FLANGE CONNECTION £960.00

Nozzle mm	Pressure atm	Discharge l/min	Length of Jet G m	Apogee H m	Distance dh m
26	4,0-5,0-6,0	860-957-1060	47-52-54	17-19,5-21	31-36-38
28	4,0-5,0-6,0	997-1110-1225	49-55-58	18-22-25	32-39-41
30	5,0-6,0-7,0	1273-1394-1520	56-59-61	21-24-26	39-41-43
32	5,0-6,0-7,0	1475-1587-1735	61-63-67	22-25-27	40-42-44
34	5,0-6,0-7,0	1645-1792-1935	62-64-69	23-25,5-28	41-43-46
36	7,0-8,0-9,0	2008-2169-2316	68-71-74	25-29,5-33	46-48-51
38	7,0-8,0-9,0	2418-2585-2743	73-77-80	31-34-36	51-54-56

BIG GUN SPRINKLER STANDS

TRIPODS & BIG GUN STANDS



A FULL RANGE OF TRIPODS & STANDS FOR SPRINKLERS ½ " TO 3" CONNECTION

Robust and stable sprinkler stands. Heavy galvanised finish. Adjustable tripod legs. Height adjustable from 1m to 1.3m.
For 1 ½" sprinklers £102.00p.
For 2" sprinklers £114.00p.

Heavy duty big gun stands with heavy galvanised finish. Four heavy lockable legs. Height adjustment from 1m to 1.3m.
For 2 ½" sprinklers £131.00p
For 3" sprinklers £163.00p.

Visit our website @ www.maddisonwatertech.co.uk

☎ 01775 725131. ☎ 01775 760730.

✉ sales@maddisonwatertech.co.uk